




REVISIONS		APP.	DATE
REV.	DESCRIPTION		

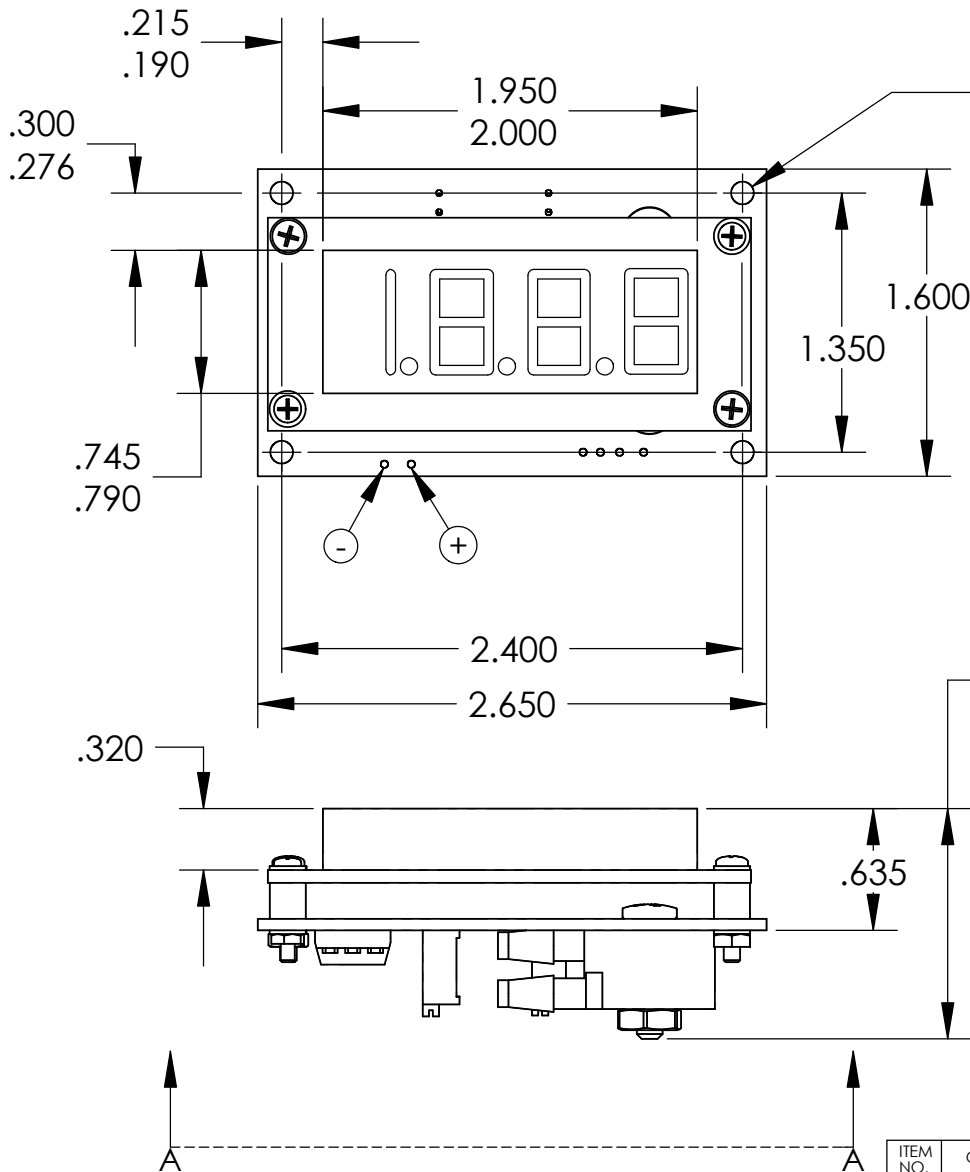

MOUNTING HOLES
4 X Ø.118



MAXIMUM
DEPTH = 1.200

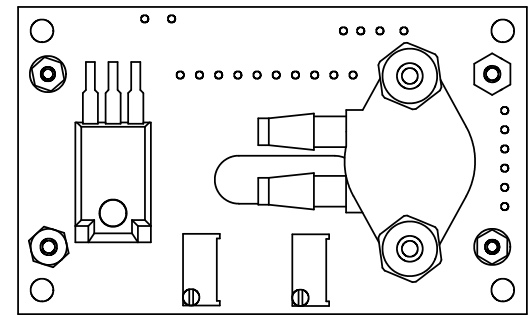

VIEW A-A

ITEM NO.	QTY	PART NO.	DESCRIPTION	REMARKS
PARTS LIST				
MATERIAL			CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE	L. J. ENGINEERING, INC. HUNTINGTON BEACH, CA
SPEC.			DRAWN BEM	
HEAT TREAT			04/29/02	
FINISH			CHECKED	
SPEC.			APPROVED	DVG-3M CUSTOMER LAYOUT
			SCALE: NONE	DVG-3M
				DVG-3M
			CAD FILE: DVG-3M Layout, PV Module Custom	SHEET 1 OF 1

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED PROPRIETARY BY L. J. ENGINEERING, INC. AND IS DELIVERED TO YOU IN CONFIDENCE. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS ARE EXPRESSLY RESERVED BY AND TO L. J. ENGINEERING, INC. AND DISCLOSURE OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF L. J. ENGINEERING, INC.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|-------------------------|
| 1. UNITS = INCHES | 6. TOLERANCES ON: |
| 2. REMOVE ALL BURRS AND SHARP CORNERS .010 MAX. | DIMENSIONS: .X = ± .060 |
| 3. DIMENSIONS APPLY BEFORE PLATING. | .XX = ± .030 |
| 4. MACHINED FILLET RADII .015 MAX. | .XXX = ± .010 |
| 5. MACHINED DIAMETERS ON COMMON CENTERLINE .004 TIR. | CHAMFER ANGLES ± 5° |
| | OTHER ANGLES ± 0° - 30° |

USED ON
NEXT ASSY